


TASSELLO CHIEDO IN ACCIAIO

Descrizione:

A battere con perno in acciaio liscio e testa nylon

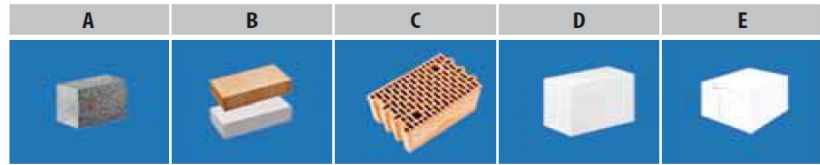

Calcestruzzo

Mattoni di argilla solida, mattoni di silicato di calcio

Blocchi porosi

Elementi su aggregato leggero LAC

Calcestruzzo aerato



ARTICOLO	Ø x Lt	Spessore isolamento	pezzi per scatola
8070W	10x70	30/10*	200
8090W	10x90	50/30*	200
8110W	10x110	70/50*	200
8120W	10x120	80/60*	200
8140W	10x140	100/80*	200
8160W	10x160	120/100*	200
8180W	10x180	140/120*	200
8200W	10x200	160/140*	200
8220W	10x220	180/160*	100
8260W	10x260	220/200*	100

* per substrato utilizzare la categoria E (calcestruzzo aerato)

TECHNICAL DATA

Parameter	Unit	Value	
Plug diameter	d_p [mm]	10	
Washer diameter	D_k [mm]	60	
Anchorage depth	h_{eff} [mm]	30/50*	
Drilled hole depth	h_o [mm]	40/60*	
Thermal conductivity	χ [W/K]	Surface mount	immersed mount
		0.004	0.002
Washer stiffness	S [kN/mm]	0.50	
Use categories	-	A B C D E	
Plug material	-	PE	
Pin material	-	Carbon steel, nylon coated head	
Technical Approval	-	ETA-16/0509	

* - for substrate use category E (aerated concrete)

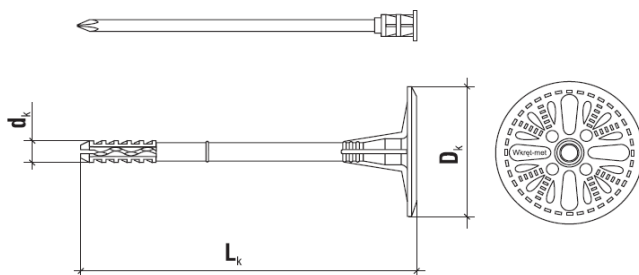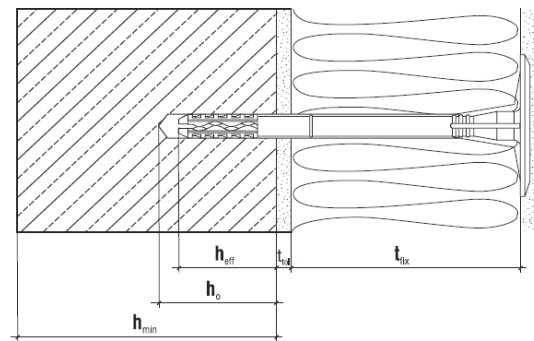


RESISTANCE

ETAG 014 use cat.	Substrate	Density [kg/dm ³]	Characteristic pull-out resistance
A	Concrete C12/15	≥ 2.25	0.75
A	Concrete C20/25 - C50/60	≥ 2.30	0.90
B	Solid clay bricks	≥ 2.00	0.90
B	Calcium silica solid brick	≥ 2.00	0.90
C	Calcium silicate hollow blocks	≥ 1.60	0.90
C	Vertically perforated clay bricks	≥ 1.20	0.90
C	Porotherm 25	≥ 0.80	0.50
D	Elements on LAC lightweight aggregate	≥ 0.88	0.90
E	Autoclaved aerate concrete AAC2	≥ 0.35	0.75
E	Autoclaved aerate concrete AAC7	≥ 0.65	0.90

Partial safety factor for anchor resistance $\gamma_m = 2$ (valid in absence of national regulations)

Metodo di installazione

Installation spot visible

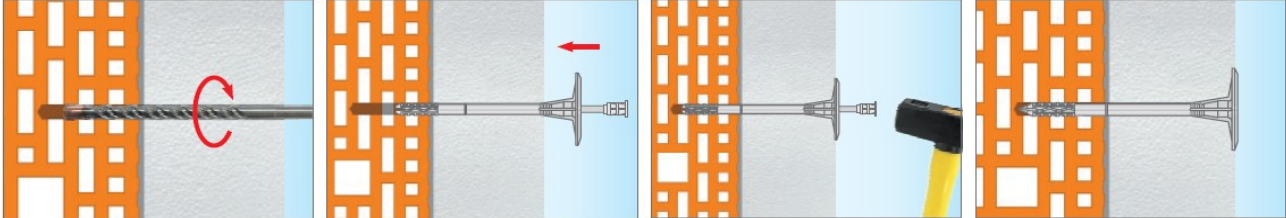

Installation spot covered up with a polystyrene disc

