

## TASSELLO CON CHIODO ACCIAIO

**NEW!**



ETAG 014  
**ABCDE**

quick drill  
**25 mm**

**strong plus**



**thermal PRO**

CONDUTTIVITA TERMICA SOLO 0,002 (W/K)!!!

ARTICOLO	Ø x Lt	Spessore isolamento		pezzi per scatola
		A,B,C,D	E	
WF100	8 x 115	80	40	200
WF101	8 x 135	100	60	200
WF102	8 x 155	120	80	200
WF103	8 x 175	140	100	200
WF104	8 x 195	160	120	200
WF105	8 x 215	180	140	100
WF106	8 x 235	200	160	100
WF107	8 x 255	220	180	100
WF108	8 x 275	240	200	100
WF109	8 x 295	260	220	100


### Dati tecnici

Ø del foro	8mm
profondità di ancoraggio	25mm*/65mm**
profondità del foro	25mm*/35mm**
Ø della rondella	60mm
rigidità della rondella	0,06(kN/mm)
Norma Tecnica	ETA 13/0724
Materiale tassello	PE
Materiale Chiodo	acciaio+nylon

\* ETAG 004 – CATEGORIA A,B,C,D

\*\* ETAG 004 – CATEGORIA E

### Metodo di installazione

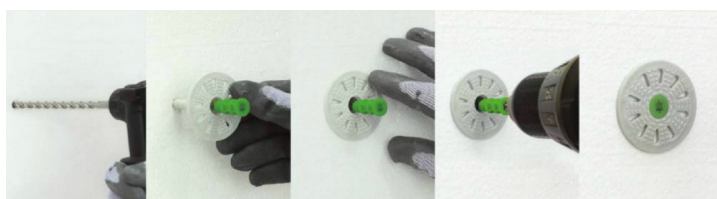

### INSULATION TYPE



POLYSTYRENE FOAM



EXTRUDED POLYSTYRENE



MINERAL WOOL



MINERAL WOOL LAMELLA

\* with support washer TDX-140 / TDX-90



MINERAL INSULATION PANELS